



High Capacity. Durable.
Commercial Grade Water Dispenser Solutions
Top Pro





Commercial Grade Water Dispenser Solutions



Built to last

Created with a high degree of craftsmanship. Dependable, tested for lasting performance. C-Tap brushed stainless-steel designer tap with glass touch pane. Designed to be repaired or refurbished.

Customer Delight

Versatile design, easy touch activation. Customisable with 5 water types. Perfect flow. Easy Access Panel. Pre-programmable portion control and water temperature

Proven performance

Total solution, High capacity for 600 cups per minute with eco-friendly refrigerant R290. BRITA filtration technology. Controlled flow and instant hot draw off. Suitable to fill bottles.

World-Class Customised Service

Service agreements, dedicated support, expert technicians, customised installation, water monitoring, and testing. Nationwide availability (AU/NZ) with white glove care. Tailored setup for personalised taste profiles.

Introducing Top Pro

Our classic, versatile water dispenser for business and healthcare.

- Versatile water dispenser to suit diverse requirements
- Choice of up to four water types: unchilled and chilled still, chilled semi-sparkling and sparkling
- Capacity designed for high consumption 85 l/h
- Outstanding hygiene through BRITA HygienePlus option – trusted by the healthcare industry for 20+ years



Top Pro



Technical data



Model	Top Pro still + sparkling	
Design / Type	countertop	base cabinet
Types of water		
Configuration options		
Hygiene feature	BRITA ThermalGate™ or BRITA HygienePlus	
Dispensing buttons	touch dispensing or mechanical buttons	
For installation independent of existing counters		base cabinet
For installation in barrier-free environments	Easy Access Panel	
For installation without waste water connection	waste water container	
Specifications		
Cooling capacity	85 l/h	
Unit dimensions (W x H x D)	278 x 530 x 518 mm	base cabinet: 278 x 910 x 518 mm base plate: 440 x 4 x 510 mm
Dispensing height	330 mm	
Weight	40 kg	base cabinet: 16 kg base plate: 7 kg
Max. power consumption	540 W	
Max flow rate, still water	2 l/min (600 cups)	
Max flow rate, sparkling water	1.6 l/min	

Top Pro

Our classic, versatile water dispenser for business and healthcare.



Medium- or high-capacity versions



The Easy Access Panel helps create a barrier-free, inclusive working environment. The optional control unit can be positioned to provide easy access for wheelchair users



The optional BRITA HygienePlus triple safeguard is designed for environments with stringent hygiene requirements. This protects your dispenser from contamination and germs




Our water dispensers produce 86% less CO₂ emissions than pre-bottled water and 64% less than bottled water dispensers



Intuitive display and choice of touch dispensing or mechanical buttons

ThermalGate™ powerful thermal-disinfection feature




High-quality materials stainless steel

Focus on sustainability: natural refrigerant and extremely low power consumption

Two installation options:

- Floorstanding
- Countertop





BRITA HygienePlus

This industry benchmark delivers the outstanding degree of protection demanded by hygiene-sensitive environments. We've developed it through over 20 years' experience working in the healthcare sector. An excellent filtration performance reduces potentially health-affecting bacteria, microbial cysts, microplastics, pharmaceuticals, legionella, and E. coli.

The BRITA HygienePlus solution consists of three safeguards, plus smart digital monitoring for additional safety. From the moment you draw water, our multi-stage filtration system is working together with smart monitoring. You can depend on fresh-filtered, hygienically pristine, crystal-clear water to quench thirst, every time.

BRITA HygienePlus has been tested in numerous studies at hygiene institutes, including the University Medical Centre of Johannes Gutenberg University Mainz, confirming microbiological safety to exacting DVGW standards.




**applies to BRITA Top Pro

BRITA HygienePlus


An industry benchmark hygiene feature.

- The first safeguard is the BRITA CLARITY Protect filter at the inlet. This includes a pre-filter to remove coarser particles, activated carbon filtration to reduce substances that impair taste and odour, and hollow fibre membrane filters to reduce pharmaceuticals, organic impurities and metals such as lead. The hollow fibre membrane filters out 99.999% of bacteria (including E. coli and Legionella) and 99.95% of cysts
- Next up is the BRITA CLARITY Safe X3. This filter – located directly upstream of the dispenser tap – is a very fine, asymmetrical double-layer membrane that removes any potentially remaining bacteria and microbial cysts just before the water is drawn. The double-layer membrane filters out microplastics, 99.99999% of bacteria (including Pseudomonas aeruginosa) and 99.95% of cysts
- Finally, BRITA's powerful ThermalGate™ feature regularly heats the dispenser outlet tap automatically. This shields against contamination from external sources, such as touching the tap and aerosol droplets from sneezing or coughing




ThermalGate™

Protects against contamination from external sources



Double-layer membrane

CLARITY Safe X3 filters out 99.99999% of bacteria and 99.95% of cysts



Activated carbon filtration

CLARITY Protect reduces substances that impair taste and odour



Hollow fibre membrane

CLARITY Protect filters out 99.999% of bacteria and 99.95% of cysts



Pre-filter

CLARITY Protect removes particles





BRITA ThermalGate™

Hygiene feature: The powerful thermal disinfection solution from BRITA.

The tap of a typical water dispenser is exposed. A sneeze or touch of a hand can introduce germs. Without a robust safeguard, microorganisms on the wet tap can go on to contaminate the dispenser. That's why our BRITA water dispensers include our ThermalGate™ feature. This regularly heats the tap to protect against contamination automatically. You can sit back and relax – knowing your water dispenser has a proactive, powerful defence against germs, tested by an independent laboratory (Ruhr District Institute of Hygiene).





**applies to BRITA Top Pro

BRITA ThermalGate™

Hygiene feature: The powerful thermal disinfection solution from BRITA.

The tap is automatically heated to over 125°C at regular intervals for thermal disinfection.

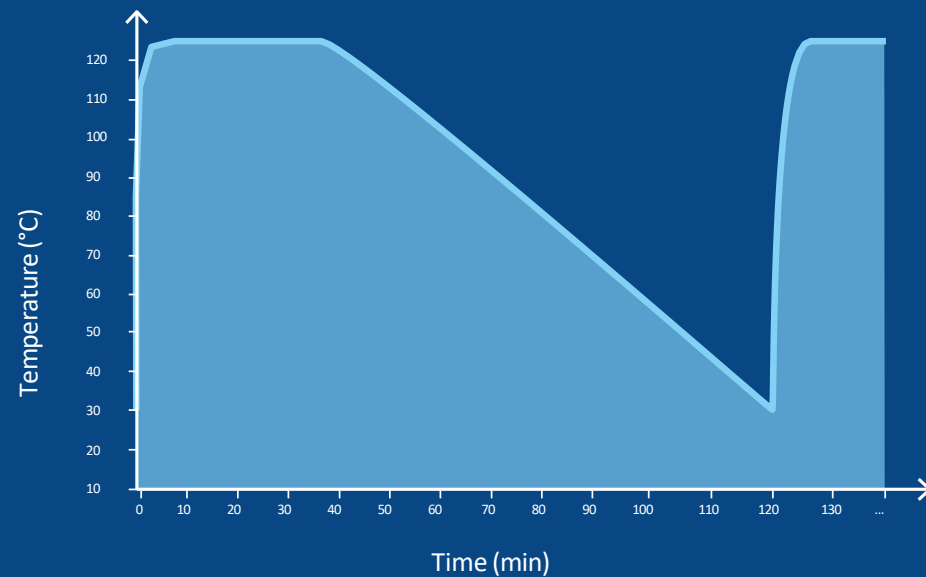

ThermalGate™
Protects against retrograde contamination.

ThermalGate™ is continuously active, providing protection not only at peak times, but also during periods of inactivity e.g., at night or on weekends

Does not require manual effort or chemical additives

Developed through over 20 years' experience in the healthcare market



Introducing Easy Access Panel

Additional BRITA dispenser control unit for a barrier-free environment.

- Control unit can be positioned to provide easy access for wheelchair users
- Helps create a barrier-free, inclusive working environment
- Installs angled or flat for mounting on the counter or cabinet
- Available for different configurations of Top Pro, Extra I-Tap and Extra C-Tap



Easy Access Panel

Additional BRITA dispenser control unit for a barrier-free environment.



Design and operation tailored to BRITA water dispensers



Barrier-free environment




Choice of water types in line with the installed BRITA water dispenser

Convenient positioning Can be installed at various heights



Three installation options:

- Angled
- Flat: on countertop
- Flat: on cabinet front



We know Water

Outstanding water filtration, created by BRITA. For over 50 years, BRITA has stood at the forefront of water filtration technologies. A globally recognized brand and trusted industry leader.




Dependable hygiene

With 20+ years in the healthcare sector. Industry Benchmark HygienePlus solution with ThermalGate™



Precision German Engineering

Filters developed and manufactured in Germany, dispensers assembled in Italy.

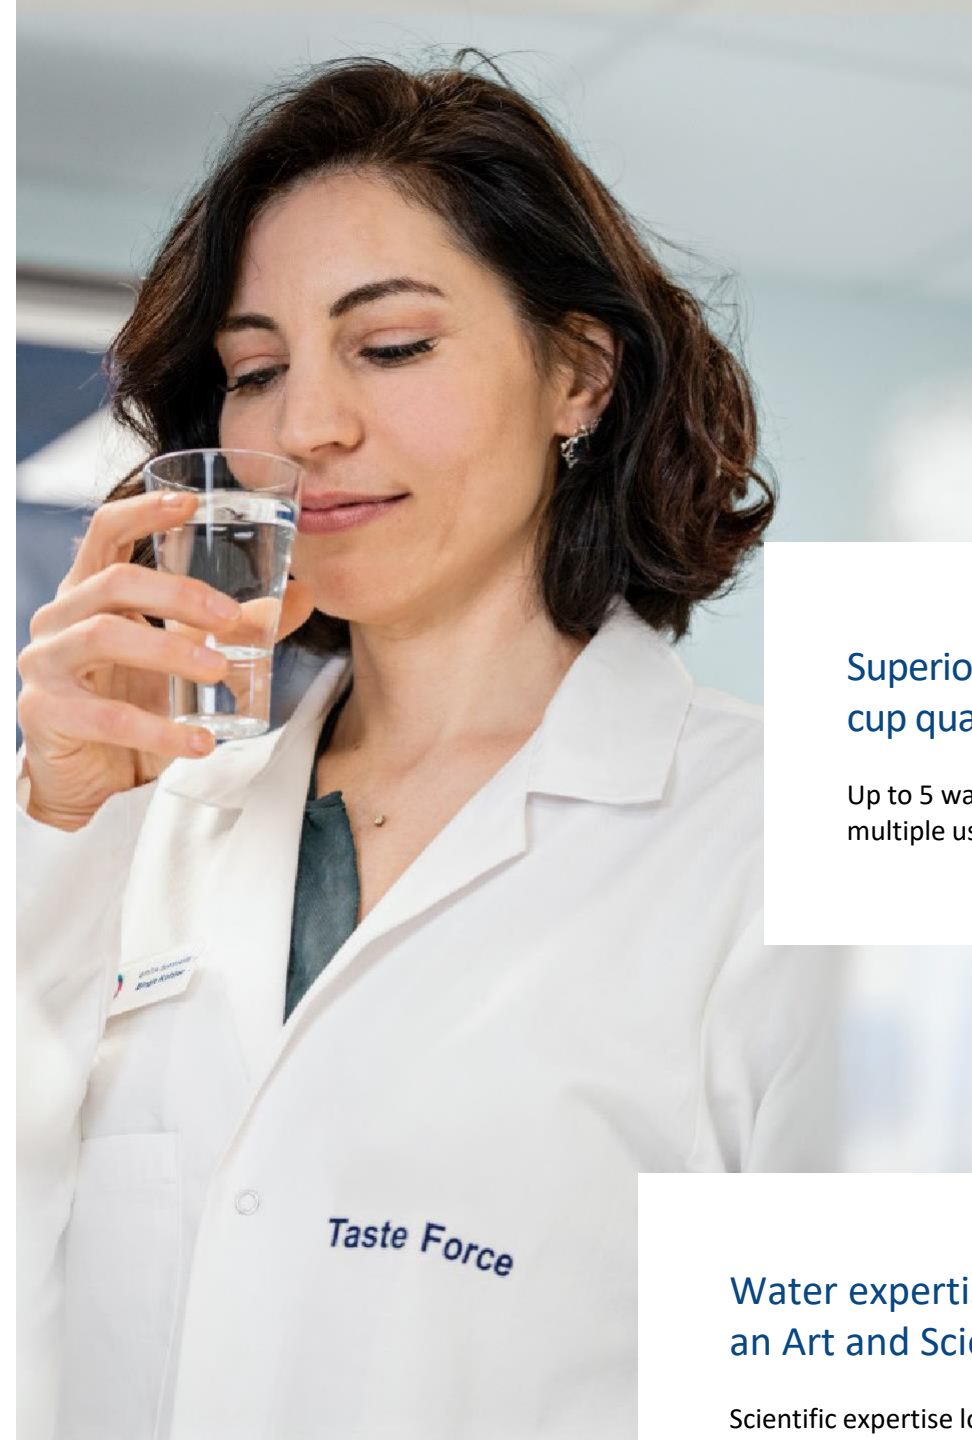

Superior Taste and in cup quality

Up to 5 water types and multiple usage occasions.

Water expertise: an Art and Science

Scientific expertise local knowhow, water mapping and customisation to AU/NZ market.

Benefits of BRITA filtration technology



When dispensing cold still or sparkling water:

- refreshing water with improved taste, every time
- reduced cloudiness for crystal-clear drinking water
- reliable dispenser operation, outstanding safety and hygiene

When dispensing hot water:

- development of full, rich aroma and flavour for hot beverages
- protection against limescale build-up to maximise your machine's lifetime and performance

The CLARITY Protect clean **1** water dispenser filter ensures exceptionally water

Mains water is strictly monitored, but some bacteria, metals, microplastics and organic impurities could remain or be introduced, via piping for example. CLARITY Protect keeps these unwanted germs and particles out of your drinking water, and also reliably reduces treatment residues, such as chlorine, that affect its taste and smell.

Hot water filtration with PURITY C Dispenser **2** filter

The PURITY C Dispenser filter protects the dispenser by reducing water hardness, tackling the common problem of limescale. It also removes unwanted, taste-impairing substances. And with its bypass settings, you can control the degree of hardness – just the right amount, for instance, to prepare a perfect cup of your hot beverage.



CLARITY Taste

Water filter: Crystal clear water for cold drinks.

Reduces:

- particles such as microplastics or sand
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres



CLARITY Taste

Water filter: Crystal clear water for cold drinks.

Sometimes, "standard" can be outstanding. CLARITY Protect delivers an extra level of safety through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our "gold standard" filter.

CLARITY Taste reduces:

Fine particles such as microplastics or sand

Metals such as lead

Pharmaceuticals, pesticides and hormones

Chlorine taste and odour

Organic impurities

Asbestos fibres



The right balance
Retains minerals in water

Activated carbon filtration
Reduces substances that impair taste and odour

Pre-filter
Removes particles



Filter capacity:
Taste 50: 4,000 l
Taste 100: 11,500 l

Perfect-tasting water with ideal properties

Protects equipment lowering dispenser maintenance costs



CLARITY Taste



Technical data



Model	Taste 50	Taste 100	Taste 50R (retrofit)	Taste 100R (retrofit)
Technology	activated carbon			
Water intake temperature	4°C to 30°C			
Ambient temperature for operation	4°C to 40°C			
Ambient temperature for storage / transport	-20°C to 50°C			
Water inlet and outlet connection	CLARITY filter head JG 8 mm		Everpure filter head	
Operating pressure	2 bar to 8.6 bar			
Flow rate at 1 bar pressure loss	180 l/h			600 l/h
Operating flow range and associated pressure loss	40 l/h to 220 l/h 0.2 bar to 1.5 bar	40 l/h to 220 l/h 0.2 bar to 1.3 bar	40 l/h to 220 l/h 0.2 bar to 1.5 bar	40 l/h to 350 l/h 0.1 bis 0.4 bar
Nominal filter capacity	4,000 l	11,500 l	4,000 l	11,500 l
Operating position	horizontal or vertical			
Efficacy				
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)			≥ 2.0 µm (DIN EN 13443)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)			pending
Reduction of metals such as lead	> 90% (DIN EN 14898)			
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)			
Reduction of organic impurities such as benzene	> 90%			
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	>90% up to at least 4,000 l (CLARITY Taste 50/50R) and 8,000 l (CLARITY Taste 100/100R)			
Dimensions (W x D x H)				
Filter system (filter head with filter cartridge)	68 x 68 x 251 mm	68 x 68 x 338 mm	-	-
Filter cartridge	68 x 68 x 224 mm	68 x 68 x 311 mm	86 x 86 x 226 mm	86 x 88,6 x 317 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 284 mm	68 x 74 x 371 mm	-	-

CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.

Reduces:

- particles such as microplastics and sand
- metals such as lead
- pharmaceuticals, pesticides and hormones
- chlorine taste and odour
- organic impurities
- asbestos fibres
- removes bacteria and microbial cysts




CLARITY Protect

Water filter: Reliably safe, excellent water for your dispenser.


Mains water is strictly controlled. But healthcare and similar environments where hygiene is of the utmost importance demand an extra level of safety. CLARITY Protect delivers this through multi-stage filtration, rather than a single activated carbon filter. CLARITY Protect sets the industry benchmark from the first stage of filtration to the moment your glass is filled with crystal-clear, refreshing water. We offer you over 50 years of filtration expertise in our “standard” filter.




CLARITY Protect reduces:




Fine particles such as microplastics or sand




Metals such as lead




Pharmaceuticals, pesticides and hormones




Chlorine taste and odour



Organic impurities



Bacteria and cysts



Asbestos fibres

The right balance
Removes minerals in water

Activated carbon filtration
Reduces substances that impair taste and odour

Pre-filter
Removes particles



Hollow fibre membrane
Filters out 99.999% of bacteria and 99.95% of cysts

Filter capacity:
Protect: 11,500 l

Exceptionally clean, safe water

Protects equipment
lowering dispenser maintenance costs



CLARITY Protect



Technical data




Model	BRITA CLARITY Protect 100
Technology	activated carbon and hollow fiber membrane filtration
Water intake temperature	4°C to 30°C
Ambient temperature for operation	4°C to 40°C
Ambient temperature for storage / transport	-20°C to 50°C
Water inlet and outlet connection	JG 8 mm
Operating pressure	2 bar to 8.6 bar
Flow rate at 1 bar pressure loss	180 l/h
Nominal filter capacity	11,500 l
Operating position	horizontal or vertical
Efficacy	
Reduction of particles such as micoplastics or sand	≥ 0.5 µm (NSF 42, Class I)
Reduction of asbestos fibres	> 99.9% (NSF 53 tested by independent laboratory)
Reduction of metals such as lead	> 90% (DIN EN 14898)
Reduction of chlorine	> 90% (DIN EN 14898, Class I) and > 50% (NSF 42)
Reduction of organic impurities such as benzene	> 90%
Reduction of pharmaceuticals, pesticides and hormones such as naproxen, lindane, estrone	> 90% up to at least 8,000
Reduction of bacteria	99.999% (ASTM F838-05)
Reduction of cysts	99.95%(NSF 53)
Dimensions (W x D x H)	
Filter system (filter head with filter cartridge)	68 x 68 x 338 mm
Filter cartridge	68 x 68 x 311 mm
Installed dimensions (vertical installation with wall mounting bracket)	68 x 74 x 371 mm

The Total Solutions Provider



Your trusted water solutions partner.
Quality, sustainability-focused, cost-efficiency.
End-to-end support for your drinking water needs

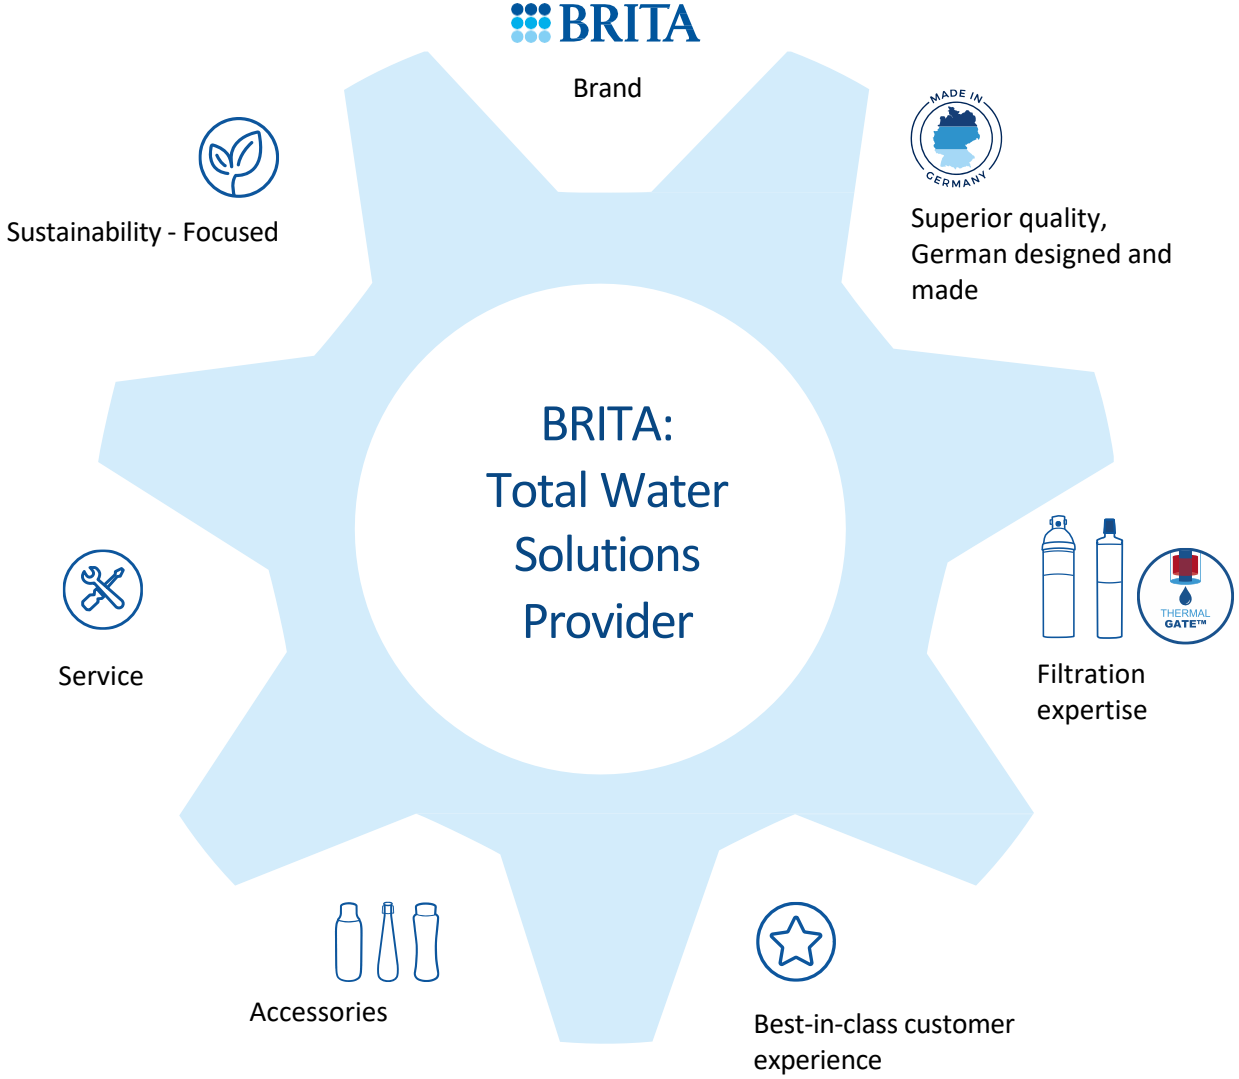

For full range options on machinery, accessories and how to become a BRITA distributor contact:
Tel: 1300 955 021 (Australia) | Tel: 0800 482 008 (New Zealand) | professional@brita.com.au | www.brita.com.au